

- ESBF635** Barrier-Free Emergency Shower, Vertically Mounted, Plastic Shower Head
- ESBF635SSH** Barrier-Free Emergency Shower, Vertically Mounted, Stainless Steel Shower Head

**Application:** Barrier-Free emergency shower for vertical mounting. Unit should be installed so that shower head is at least 82" above floor and 32" from wall or nearest obstruction.

**ADA Compliance:** When installed at recommended mounting heights, unit complies with ADA requirements for accessibility by handicapped persons (maximum height and reach and distance from obstructions).

**Shower Head:** 10" diameter. Shower head is orange ABS plastic (ESBF635) or stainless steel (ESBF635SSH).


**Valve:** 1" IPS chrome plated brass stay-open ball valve. Valve is US-made with chrome plated brass ball and Teflon® seals. Furnished with stainless steel actuating arm and 59-1/2" stainless steel pull rod.

**Supply:** 1" NPT female inlet.


**Sign:** ANSI-compliant identification sign.

### Available Options

- GRN** Safety green ABS plastic shower head.
- YEL** Safety yellow ABS plastic shower head.
- PCH** Polished chrome plated cast brass shower head.
- FC20** Regulates shower flow rate to 20 GPM.
- SC** Self-closing ball valve. *Note: Emergency showers with self-closing valves do not comply with ANSI Z358.1 - 2014.*
- TMV** AP3800 thermostatic mixing valve precisely blends hot and cold water to deliver warm (tepid) water as required by ANSI Z358.1-2014. Refer to "Tempering Units" section for complete technical and product selection information.

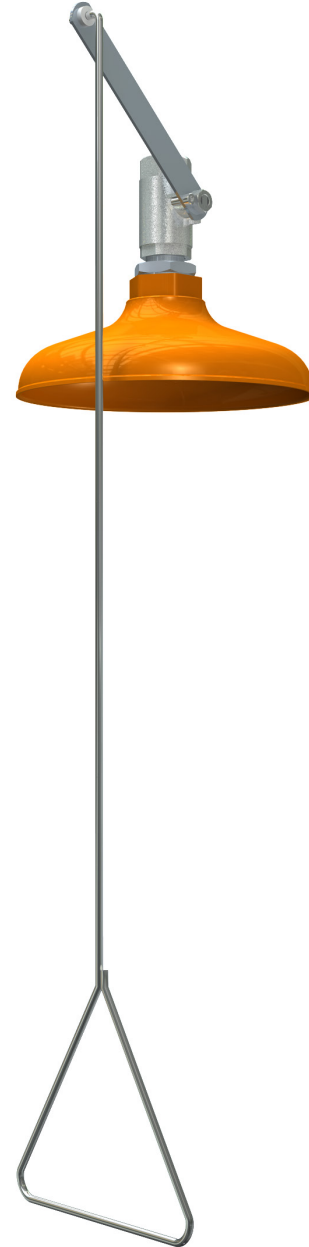

- ESBF635** Barrier-Free Emergency Shower, Vertically Mounted, Plastic Shower Head
- ESBF635SSH** Barrier-Free Emergency Shower, Vertically Mounted, Stainless Steel Shower Head

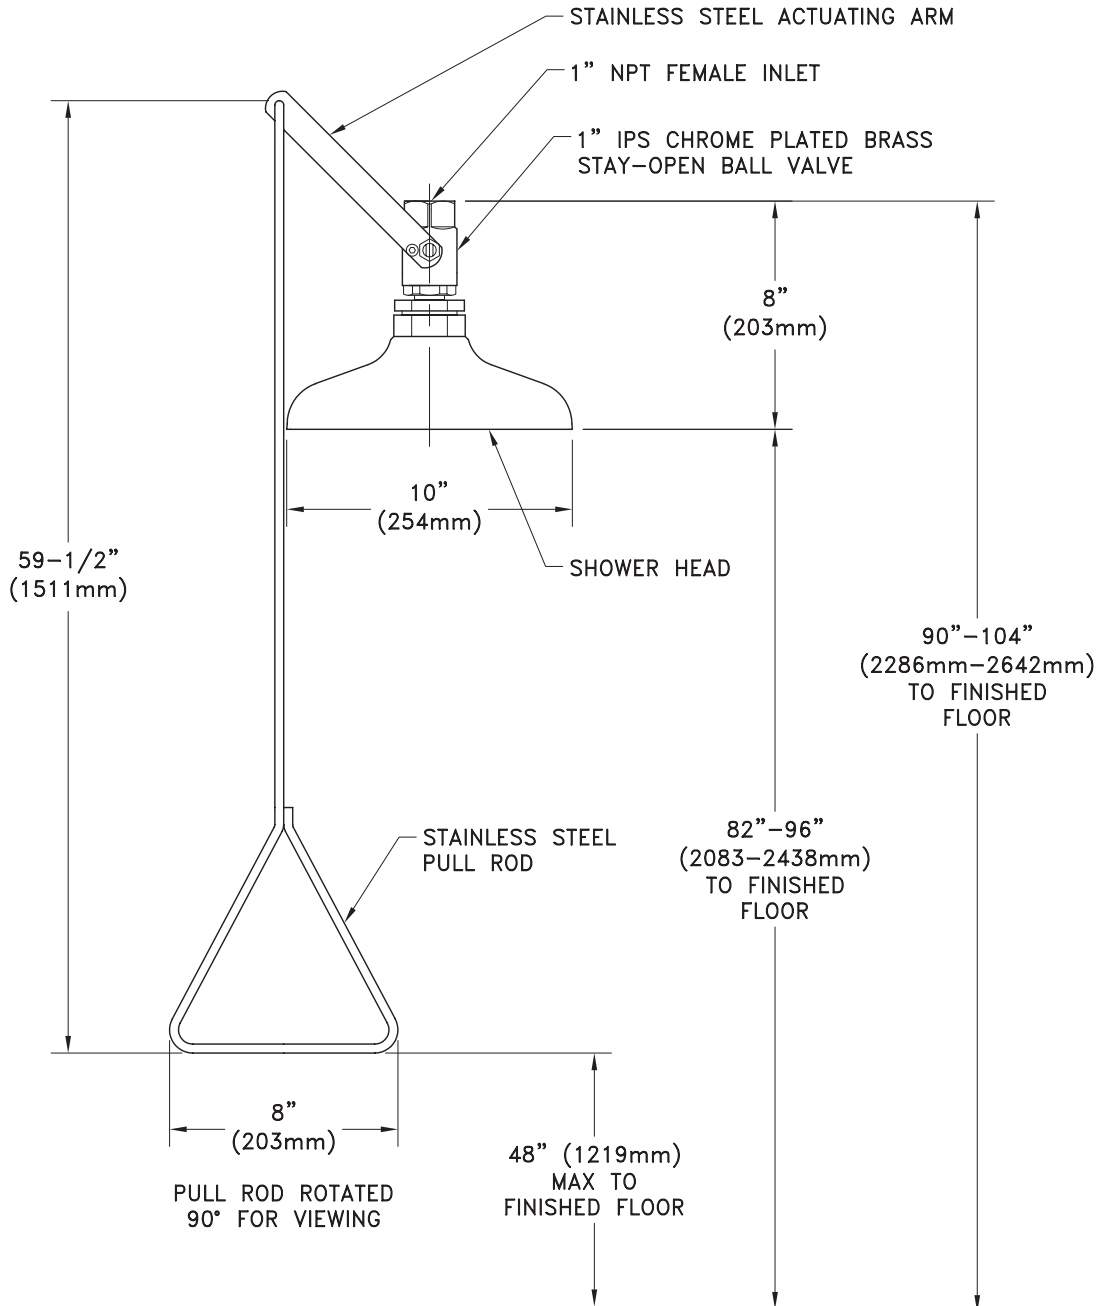

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL

Due to continuing product improvement, the information contained in this document is subject to change without notice. All dimensions are  $\pm 1/4"$  (6mm). rev. 0315

Sign Included

